



Exhibit 3 - P 2 of 4

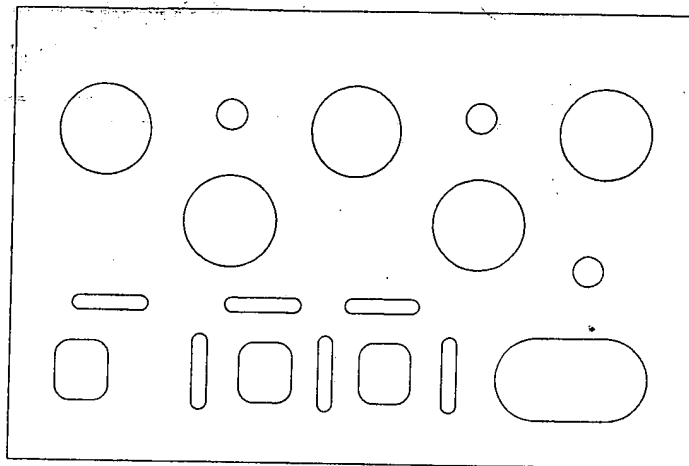

KEYCAPS A : STROKE = 1.  
 A & B FORCE = 125 ~ 150g  
 SNAP RATIO  $\approx$  50%

~~KEYCAPS B : STROKE =~~

- MATERIAL SHOULD BE CHOSEN FOR OIL & SOLVENT RESISTANCE. (CLEAR/TRANSLUCENT)
- GRAPHICS SHOULD BE COATED FOR WEAR & OIL RESISTANCE (SEALPLAST)
- AIR CHANNELS NOT SHOWN, BUT SHOULD BE KEY TO KEY. NO PERFORATIONS ARE ALLOWED. (MUST BE SEALED)
- CARBON PILL CONDUCTOR



Keypad

Drawn By: S.Garnett for MEC Ltd.

Date: 10/11/97

Scale:


Page: 3/3

2

3

4


A

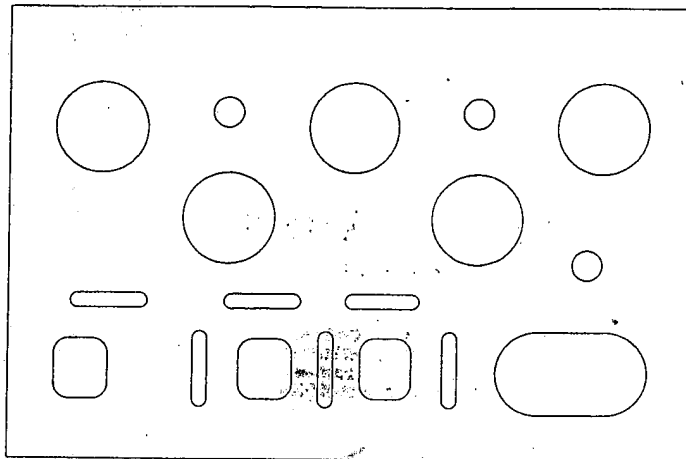

B

C

## KEYPAD LEGEND



BATT FIRE SAFE

BEZEL LEGEND (NOT PART OF KEYPAD)



MICROGRAFX

## Keypad BEZEL LEGEND

Drawn By: S.Garnett for MEC Ltd.

Date: 10/11/97

Scale:

Page: 1 / 1

Exhibit 3 - 194 of 4